



Pulsed Operation of the UW-IEC Device

Ross Radel

University of Wisconsin

8th US-Japan Workshop

Kansai University

May 10th, 2006



Outline



- HEU detection methods
- UW pulsed IEC design
- High-speed diagnostics
- Neutron production characteristics
- Summary and future work



Importance of Research



- There have been at least 150 incidents of nuclear smuggling in past decade (IAEA)
- Half involve enriched uranium or plutonium
- As little as 16 kg of HEU or 6 kg of Pu can be used to produce a 20 kiloton weapon, even with low technology levels
- Border security is a proven safeguard, but technology to detect HEU is not yet available
- Developing technology for the detection of HEU has become a priority for the US Department of Homeland Security






There are Two Categories of Non-Destructive Special Nuclear Material Detection




- Passive and active detection
- Passive detection is unreliable for HEU
 - Low count rates
 - Simple to shield
 - Calorimetry easy to deceive
- Active Detection is more applicable
 - Neutrons or photons
 - Neutrons are highly penetrating in high-Z material
 - Large fission cross-sections



UW Concept for Active Detection of HEU

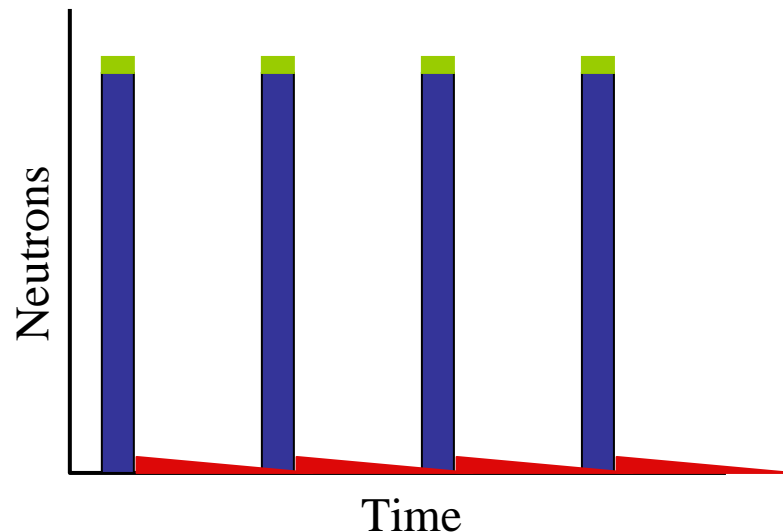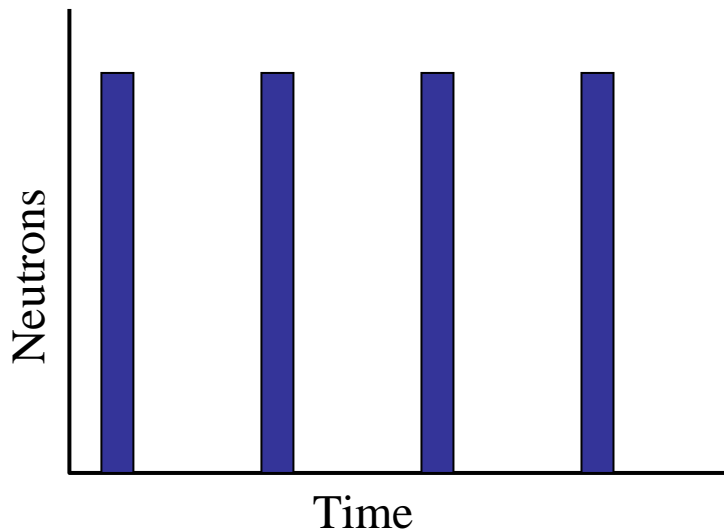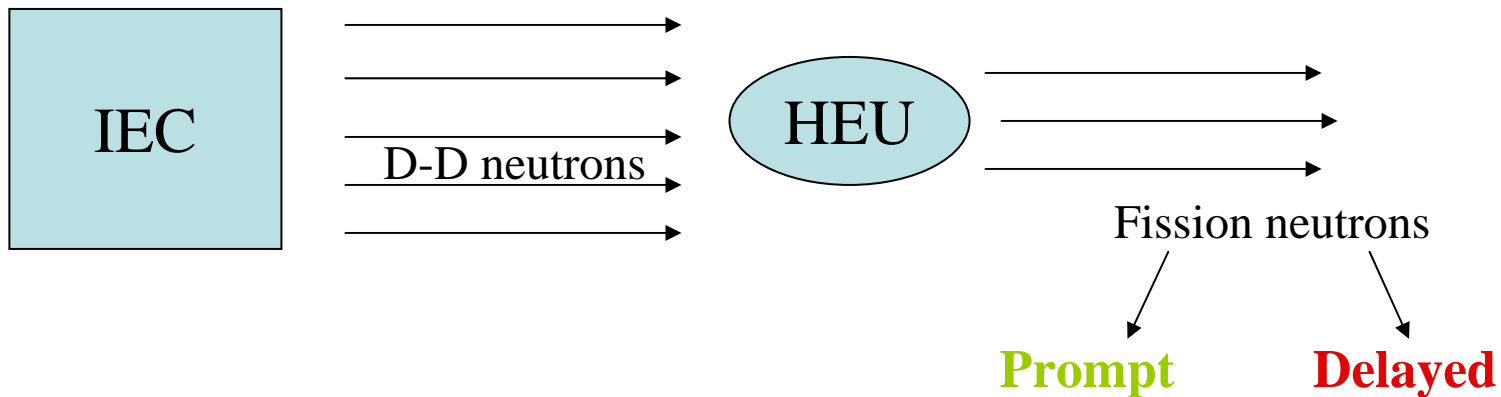

Initial Design Uses Ion Source to Generate Pulses

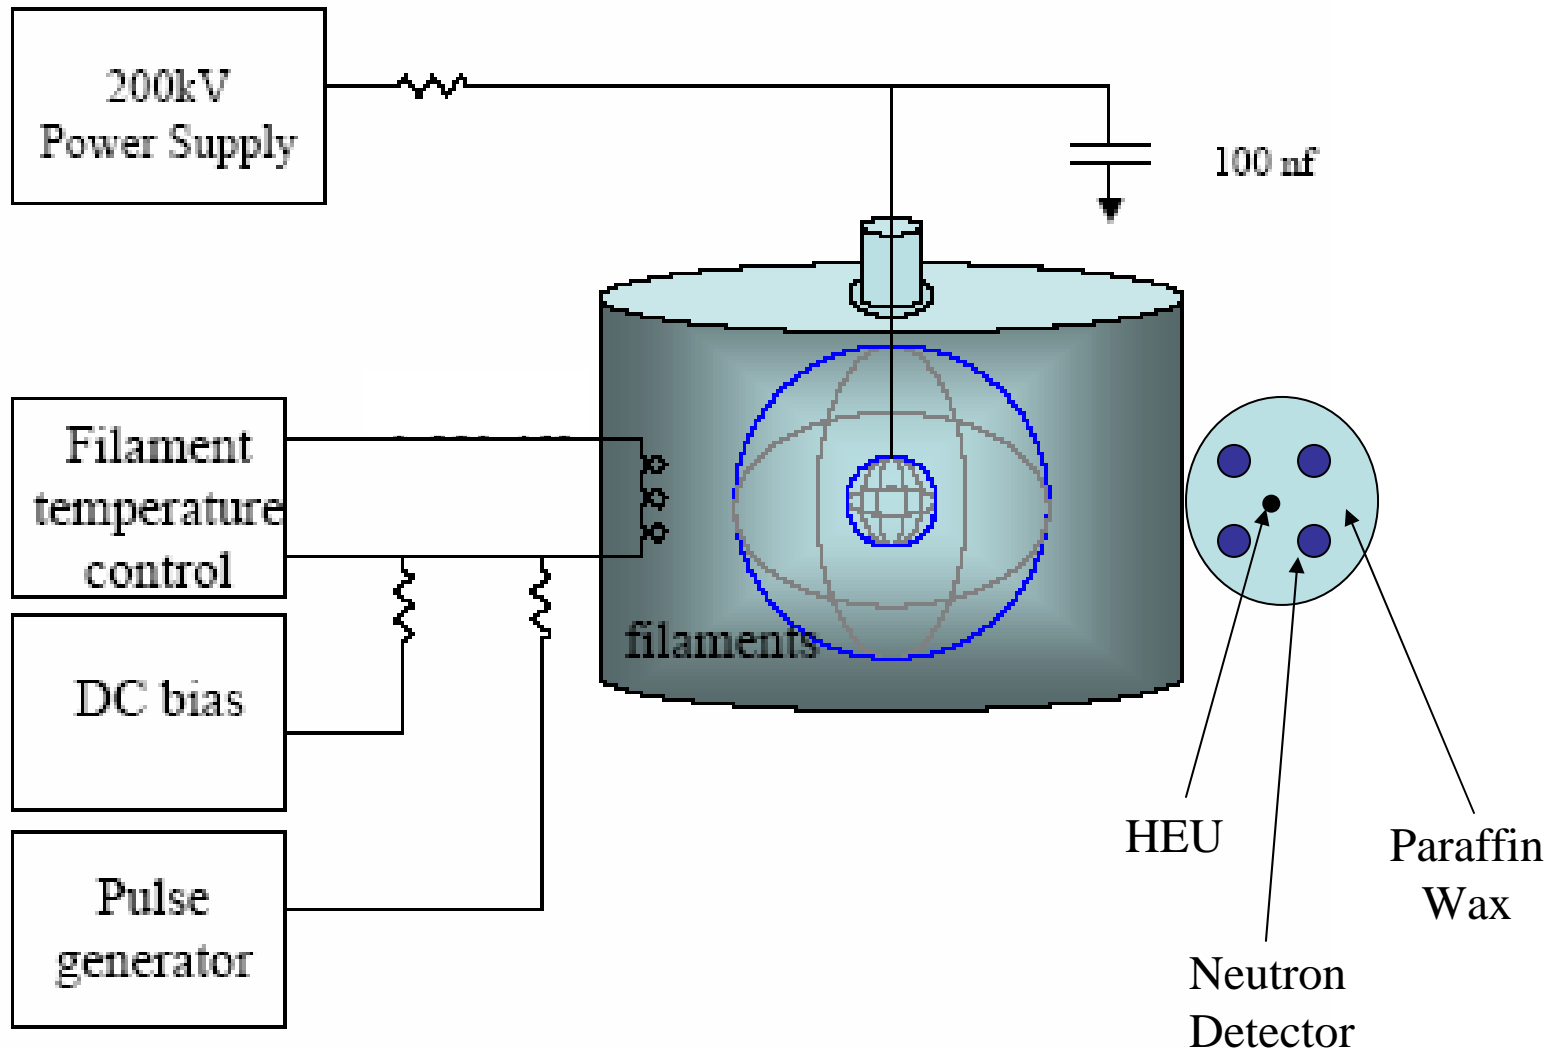



Pulse Video



- Video taken at 80 kV, 0.3 Pa D₂, 500 mA pulse current




Current Status



- Max Voltage: 110 kV
- Max Pulse Current: 3 Amps
- Shortest Pulse: 10 μ s
 - Cathode current: $\sim 70 \mu$ s
 - With “flat top” current: 200 μ s
- Max Neutron Rate During Pulse to Date:
 - 1.5×10^9 n/s (80 kV, 3 A, 0.38 Pa D₂)




High-Speed LabVIEW Diagnostic Provides View of Pulse Trace

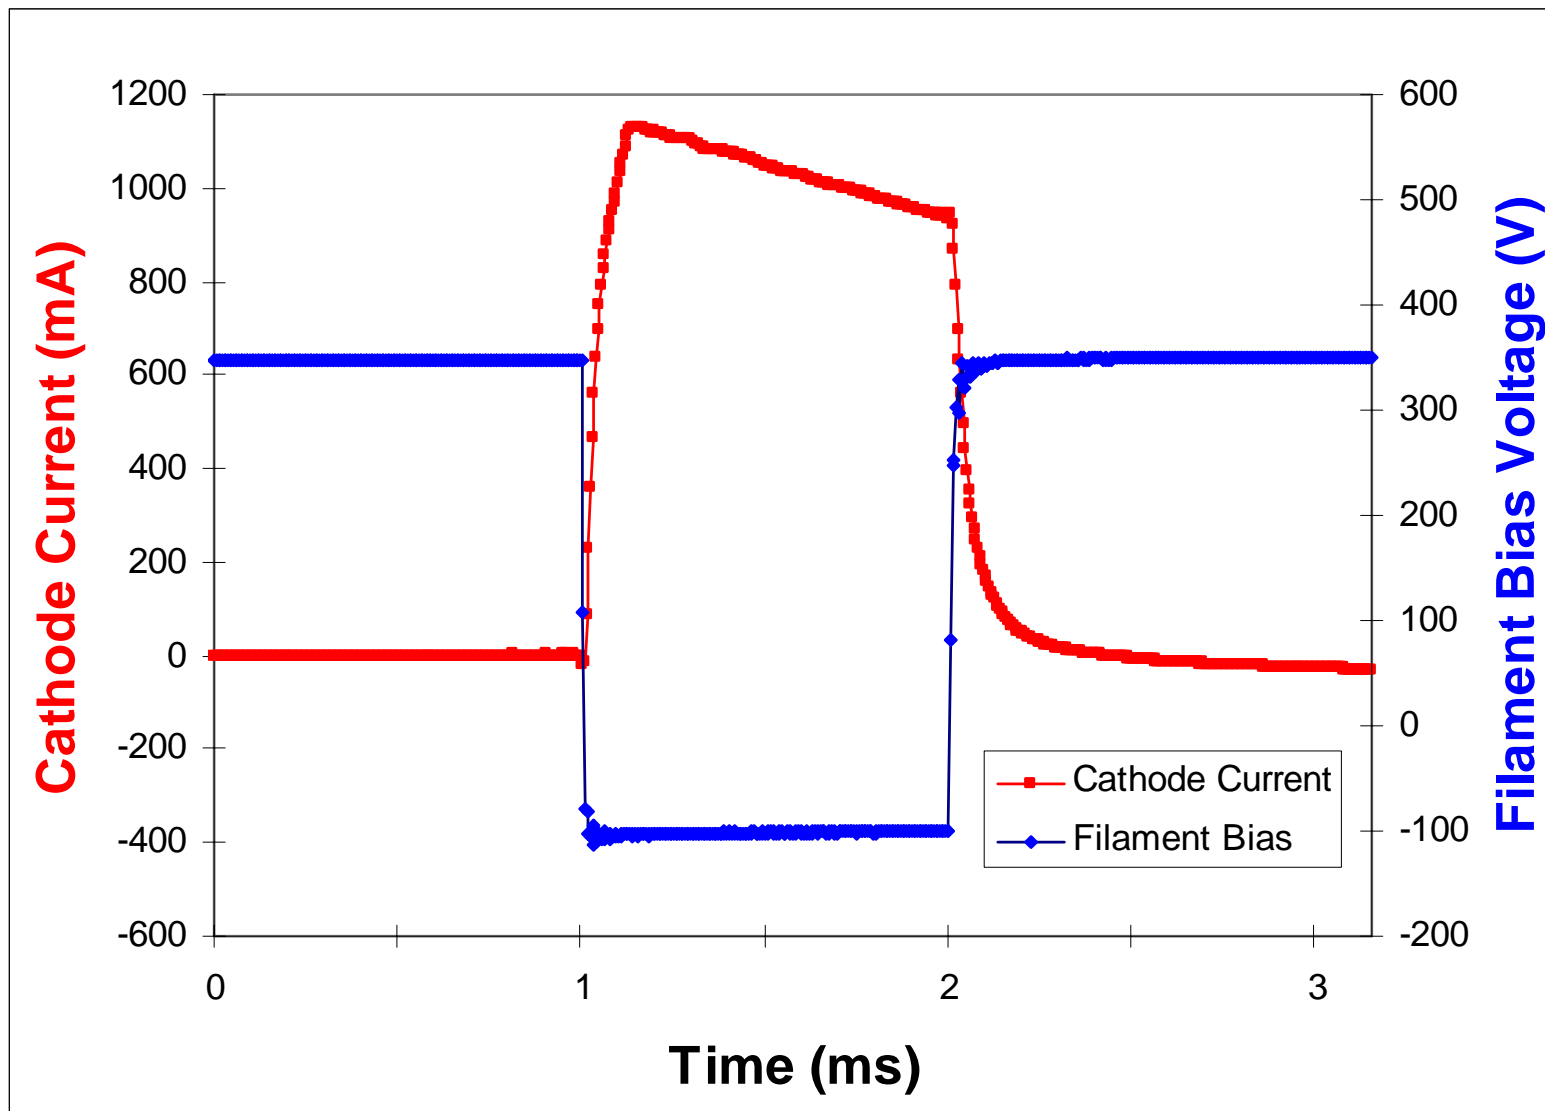



High-Speed Neutron Diagnostics Provide Greater Insight into Pulsed Operation

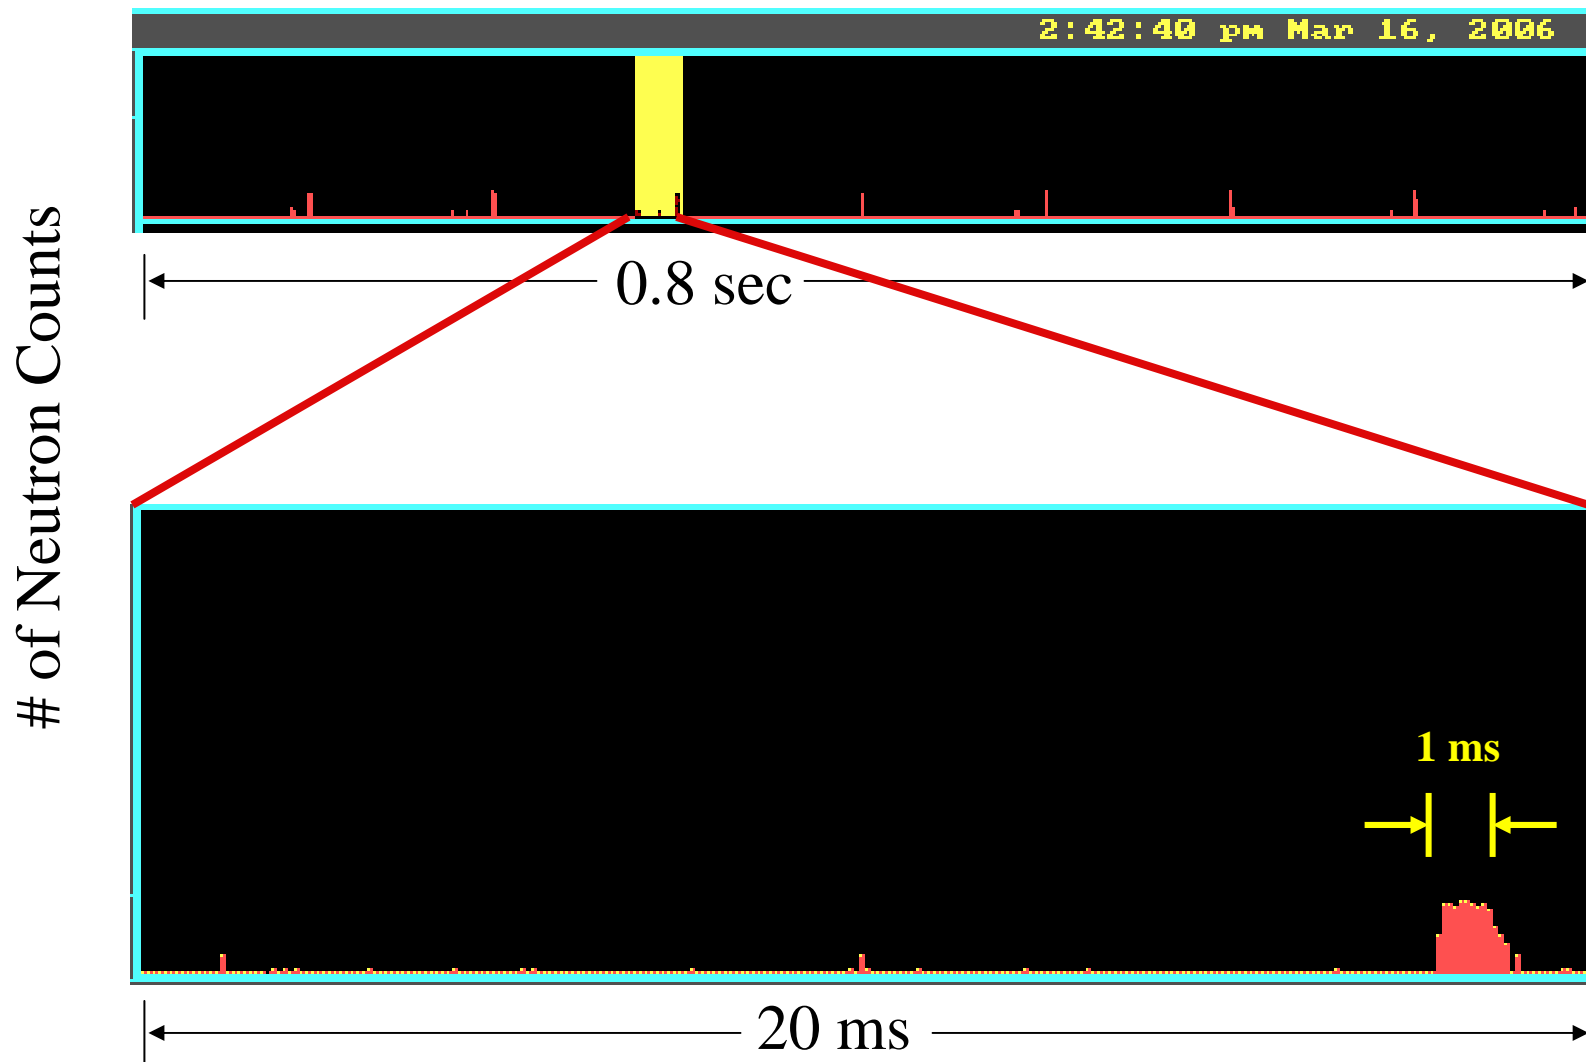





Larger Cathode Yielded Higher Pulse Current and Neutron Rates




- Pulse current increased by $\sim 20\%$ when switching from 10cm to 20 cm cathode
- Average ion energy is higher
 - Ions encounter fewer neutrals as they are accelerated

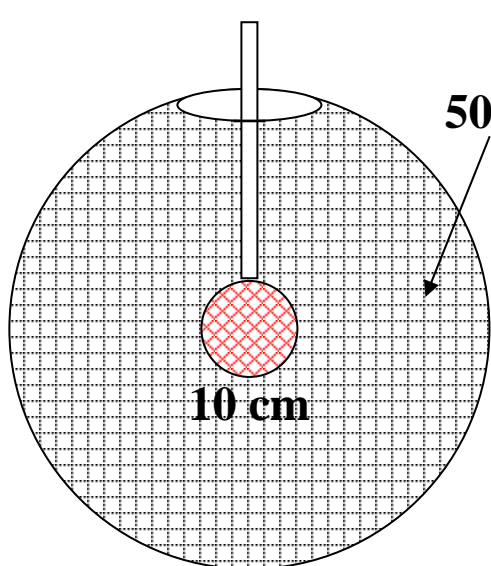

Past Configuration

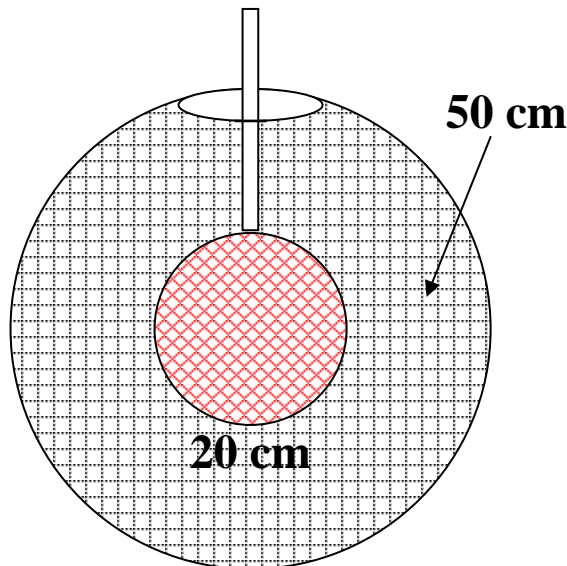


Current Configuration

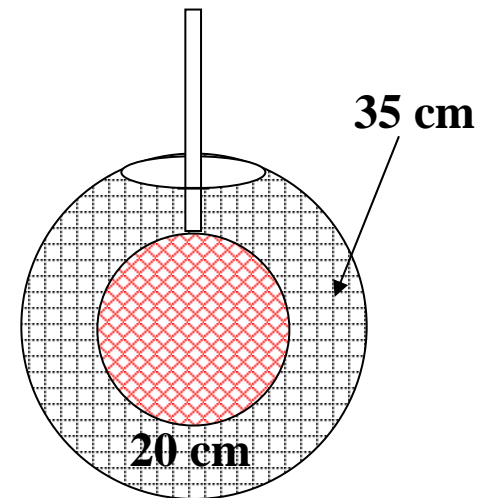

Future Configuration? 11



Pulse Current Increases Linearly with Cathode Voltage

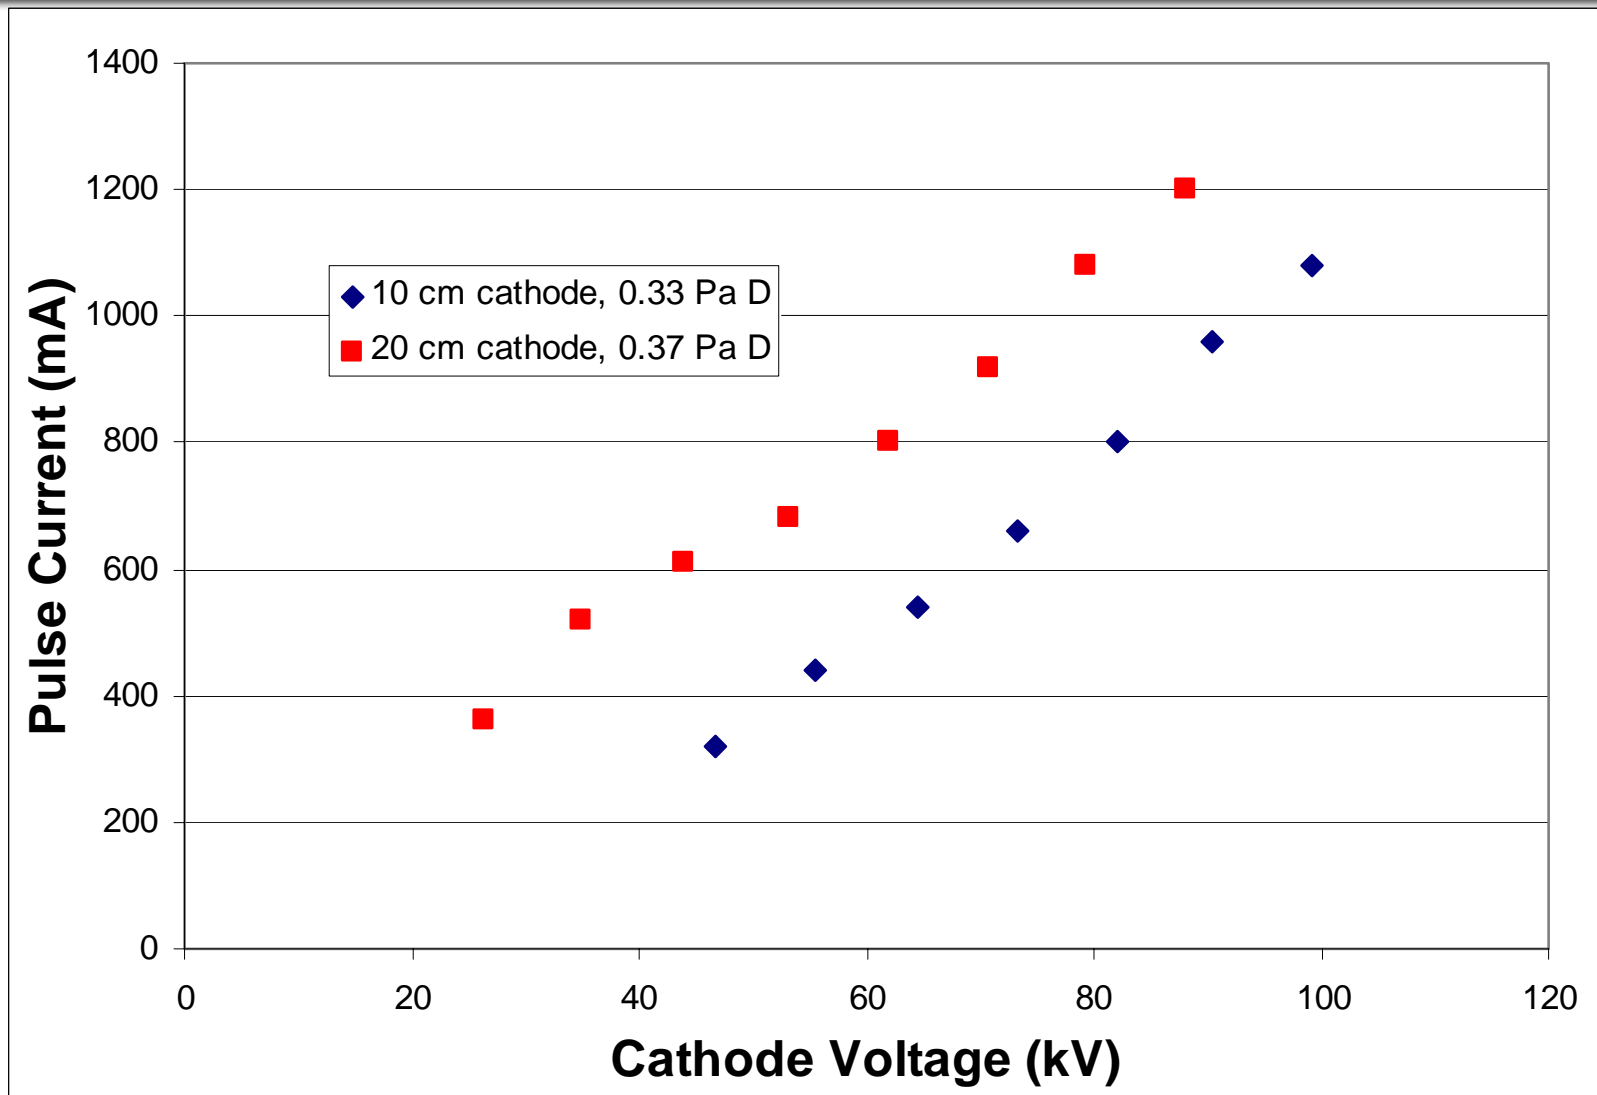


**constant source conditions for both experiments



Neutron Rate Scaled Less Than Linearly With Pulse Current in Initial Design



- Filament power adjusted to change current
- 10 k Ω resistor currently in series with IEC to limit arc current
- Cathode voltage drops accordingly with increased pulse current
- Future design will reduce resistor to 1 k Ω

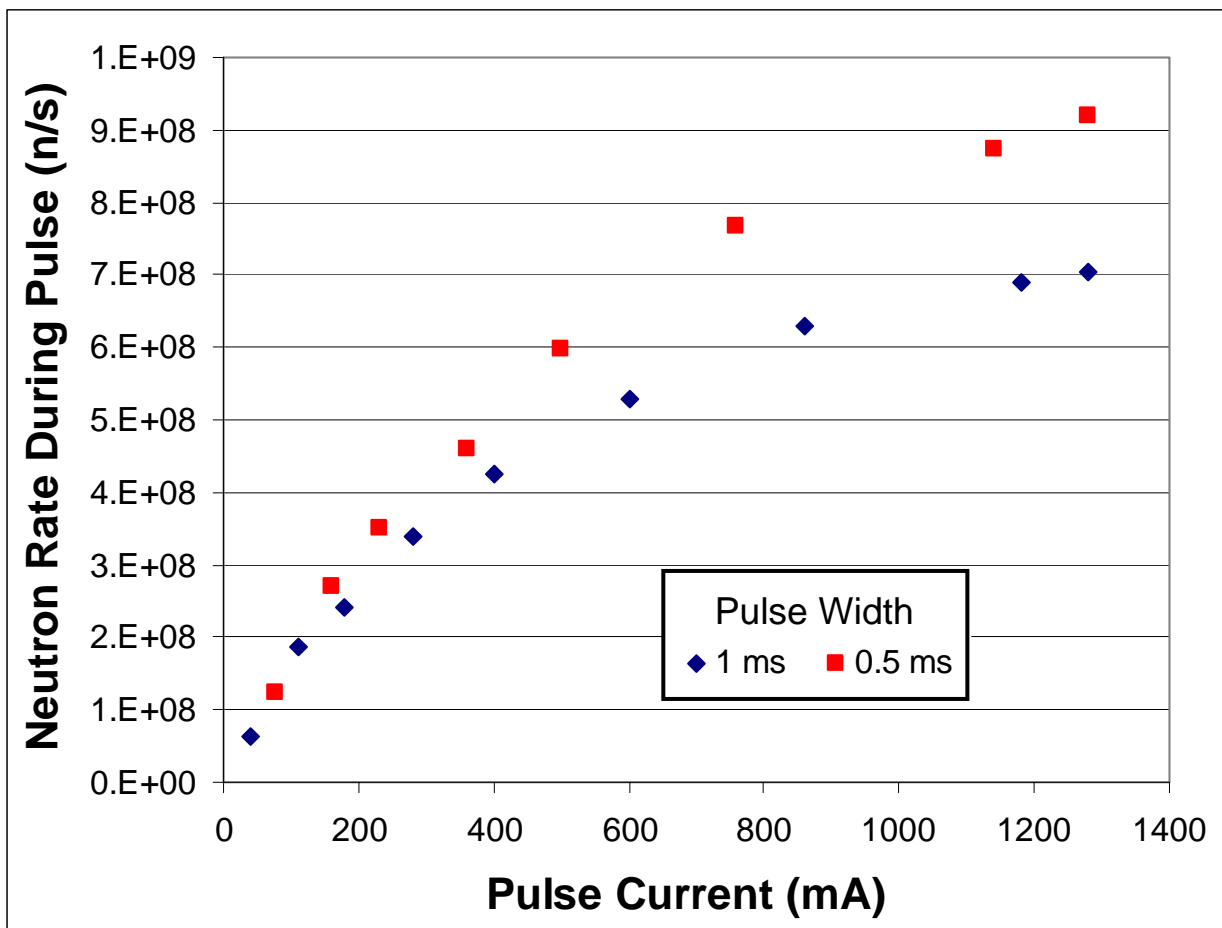

Data taken at 90 kV (meter), 0.36 Pa D₂



Summary



- Pulsed IEC has been developed that is capable of operation at 110 kV, 2.4 A, 0.37 Pa D₂
- Pulsed neutron rates of 1.5×10^9 n/s have been achieved during 500 μ s pulses
- New diagnostics have provided greater insight to high-speed operation
- Operation with 20 cm cathode has improved pulse current and neutron rates



Future Experiments will Focus on Increasing Pulse Current and Neutron Production



- Generate higher current from filaments
 - Study contributions of individual filaments
 - Add additional filaments
 - Increase negative pulse voltage
- Pull more current into cathode
 - Increase cathode size
 - Recent experiments have looked at 10 cm vs. 20 cm cathodes
 - Replace 50 cm anode with 35 cm anode
- Begin irradiation of HEU samples
 - Detection hardware is available for initial experiments
 - HEU sample should be available in near future

Questions?



