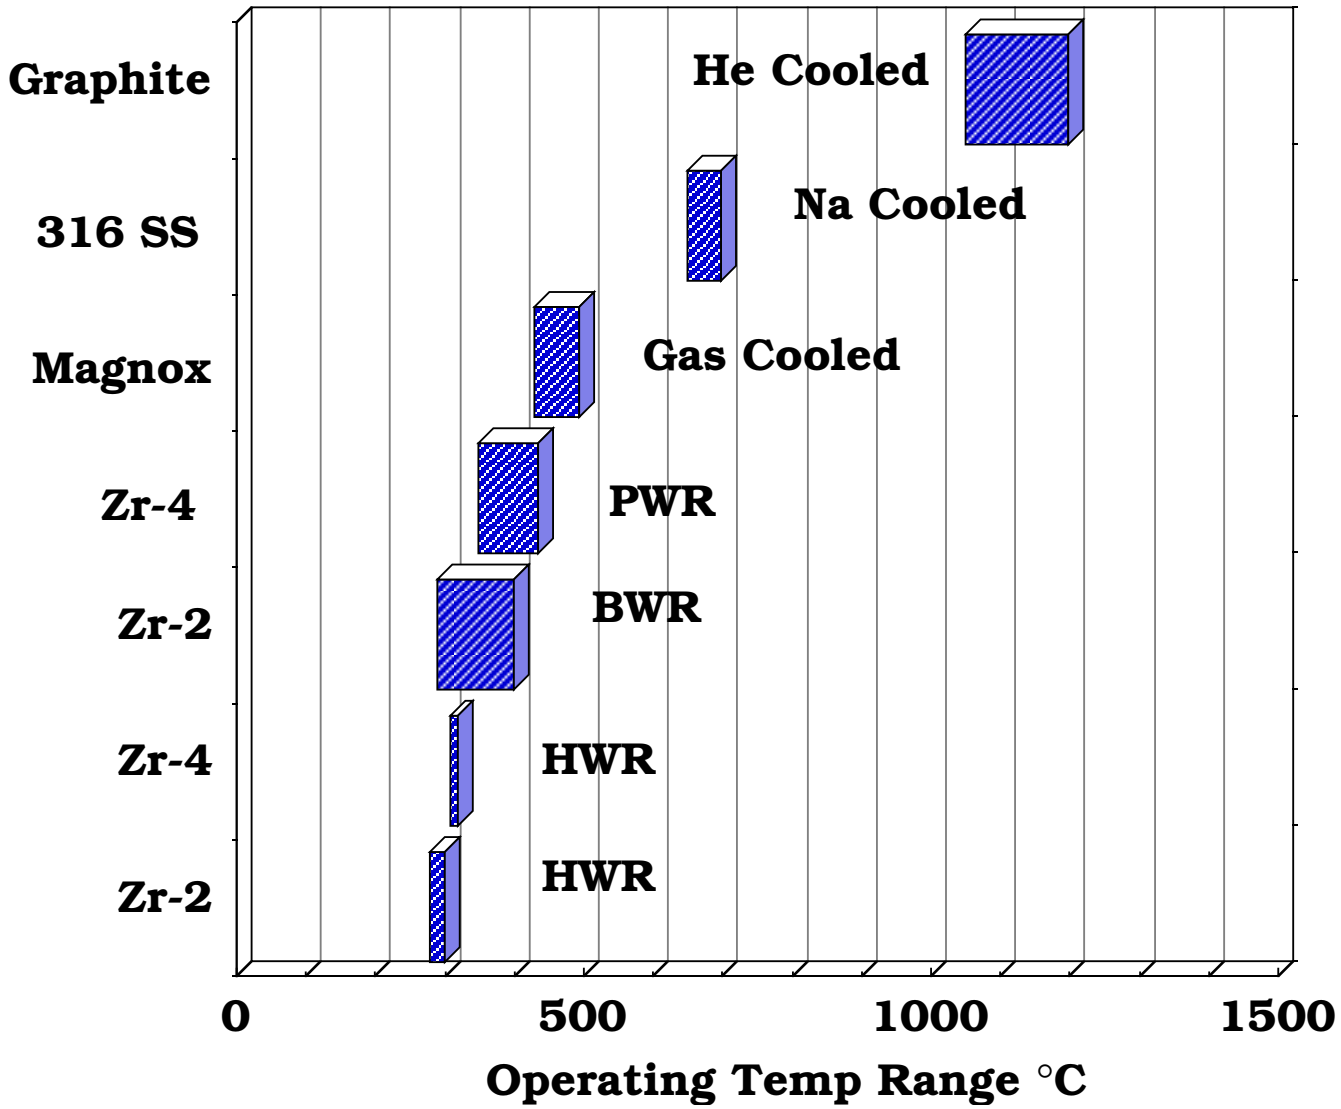Operating Temperature Range for Cladding Material for Fission Reactors