



*D-³He Magnetic Fusion
Space Propulsion*

John F Santarius

**Fusion Technology Institute
University of Wisconsin**

20th International Space Development Conference


Albuquerque, New Mexico

May 24-28, 2001




Physics Viewpoint: D-³He Fuel Requires High β^\dagger , $n\tau$, and T

Power density

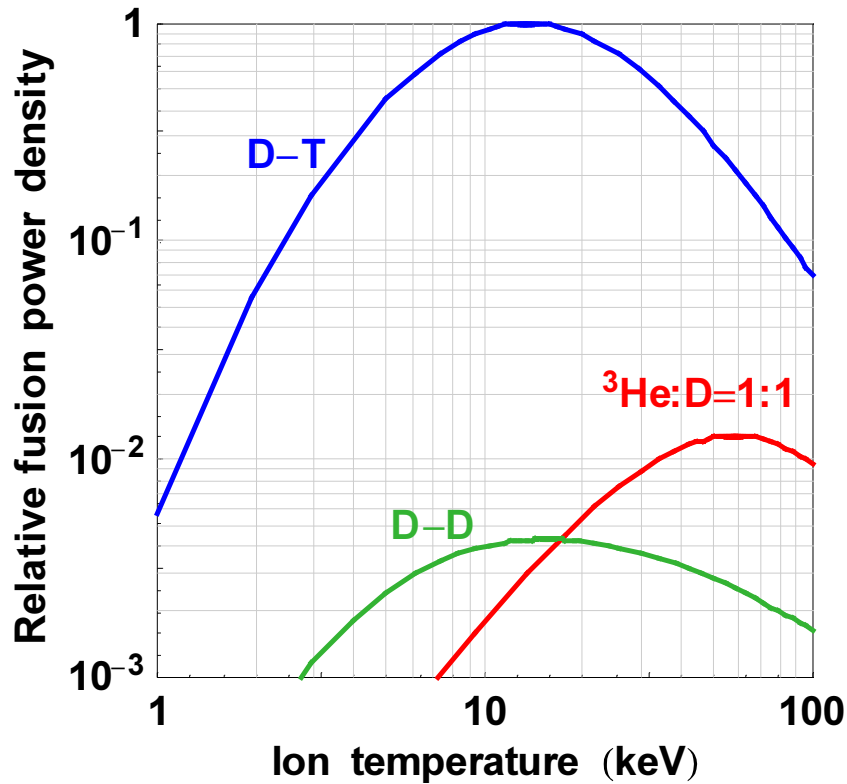

Confinement

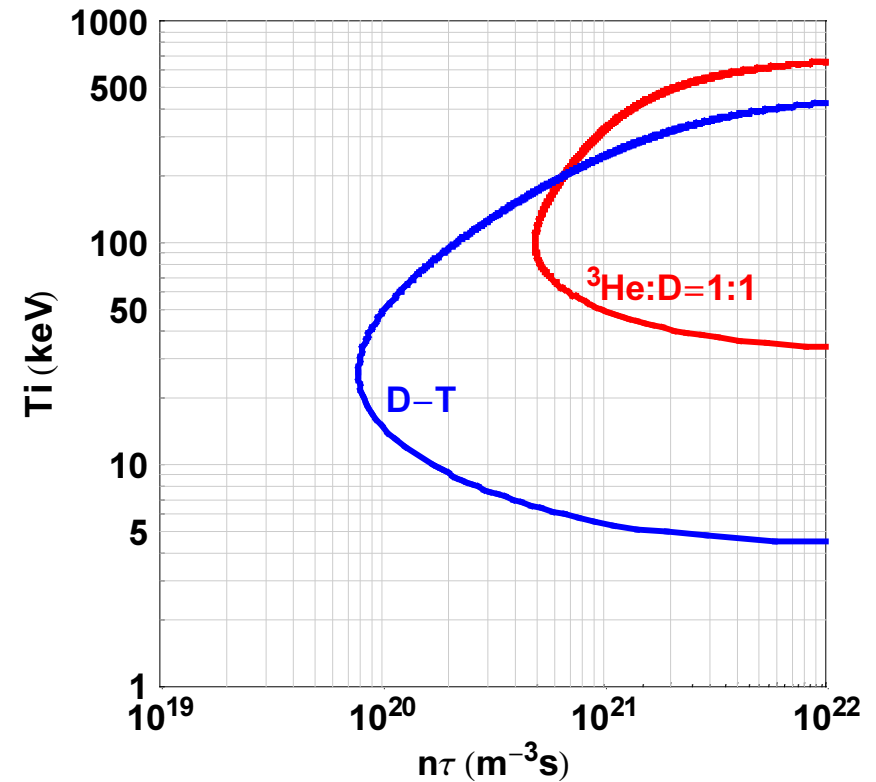


$\dagger \beta = \text{plasma pressure/magnetic field pressure.}$



Engineering Viewpoint: D-³He Fuel and High β Relax Constraints

- Many configurations can increase fusion core B fields, gaining power density due to the $\beta^2 B^4$ scaling.
- Reduced neutron flux allows
 - Smaller radiation shields
 - Smaller magnets
- Increased charged-particle flux allows direct energy conversion to thrust or electricity

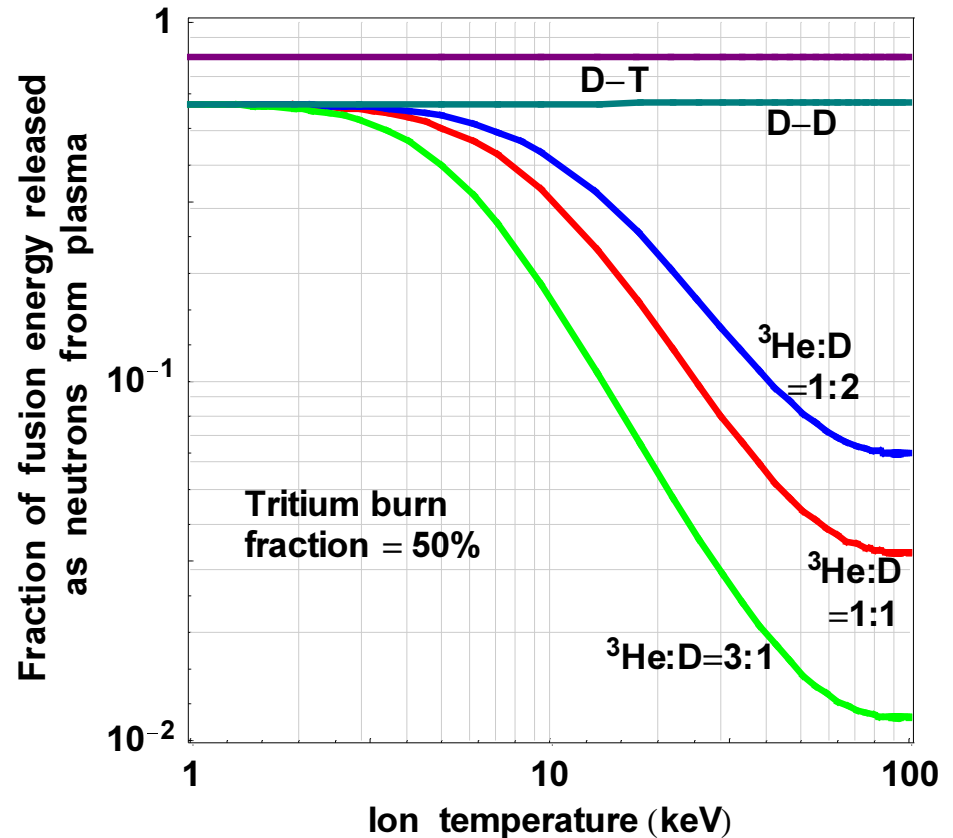



Predicted Specific Power of D-³He Magnetic Fusion Rockets is 1-10 kW/kg


- Prediction based on reasonably detailed magnetic fusion rocket studies performed during the past fifteen years.
- Rationale for this performance supported by J.F. Santarius and B.G. Logan, “Generic Magnetic Fusion Rocket,” *Journal of Propulsion and Power* **14**, 519 (1998).
- Development of high-temperature superconductors should reduce the power-plant mass.
 - Reduced refrigerator mass for magnet coolant.
 - Reduced shielding, because more magnet heating can potentially be tolerated before quenching.




At the Predicted $\alpha=1-10$ kW/kg, Fusion Propulsion Would Enable Attractive Solar-System Travel

- Comparison of trip times and payload fractions for chemical and fusion rockets

Fast human transport

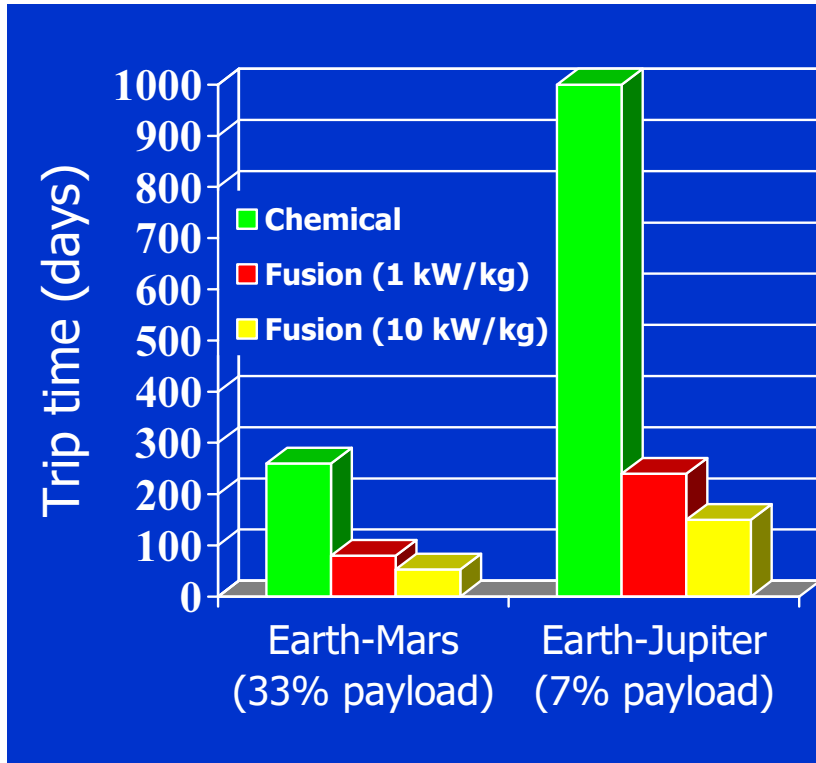

Efficient cargo transport

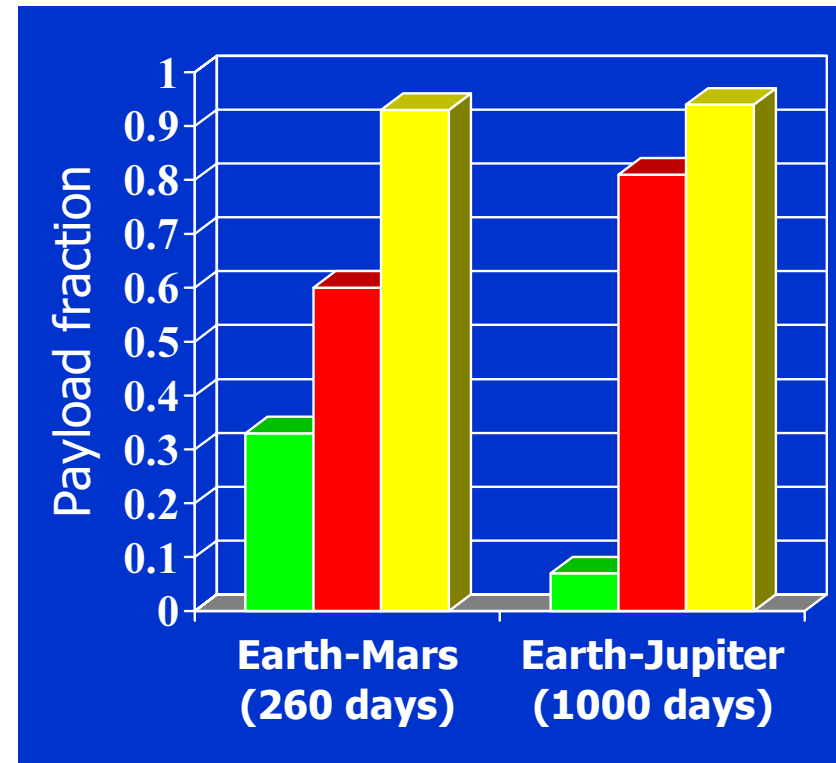




Earliest D-³He Reactor Design Was a Fusion Rocket

G.W. Englert,
NASA Glenn Research Center
New Scientist (1962)


“If controlled thermonuclear fusion can be used to power spacecraft for interplanetary flight it will give important advantages over chemical or nuclear fission rockets.

The application of superconducting magnets and a mixture of deuterium and helium-3 as fuel appears to be the most promising arrangement.”

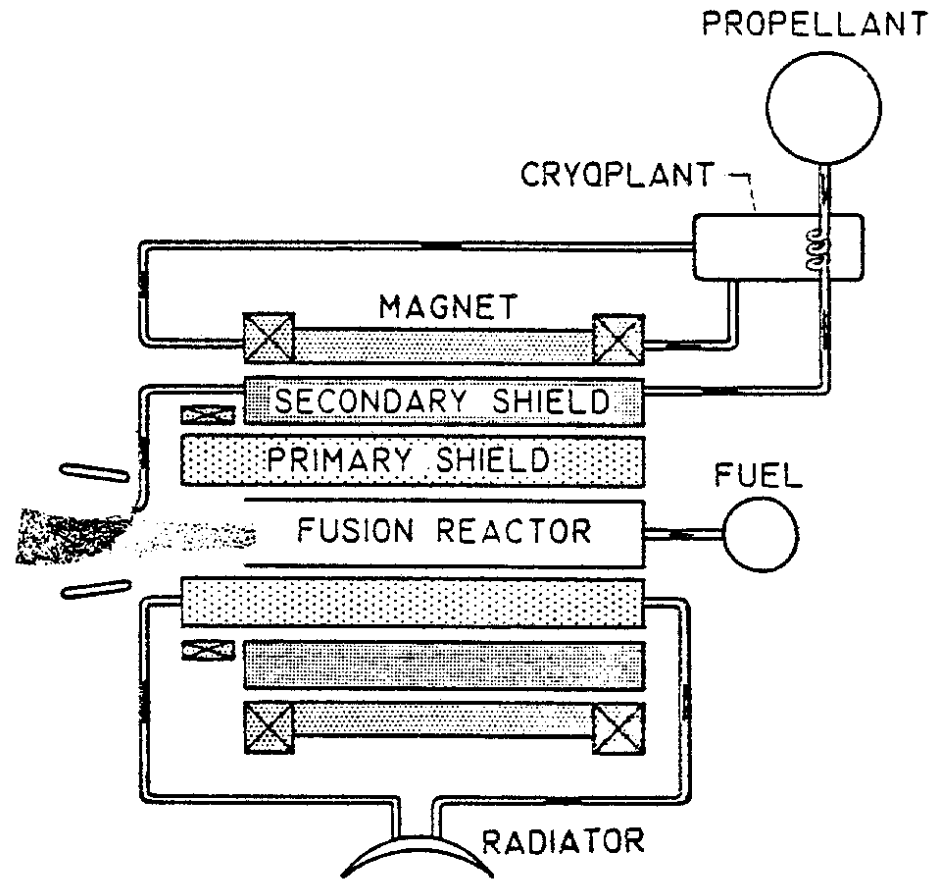




Conventional Tokamaks Have High Mass

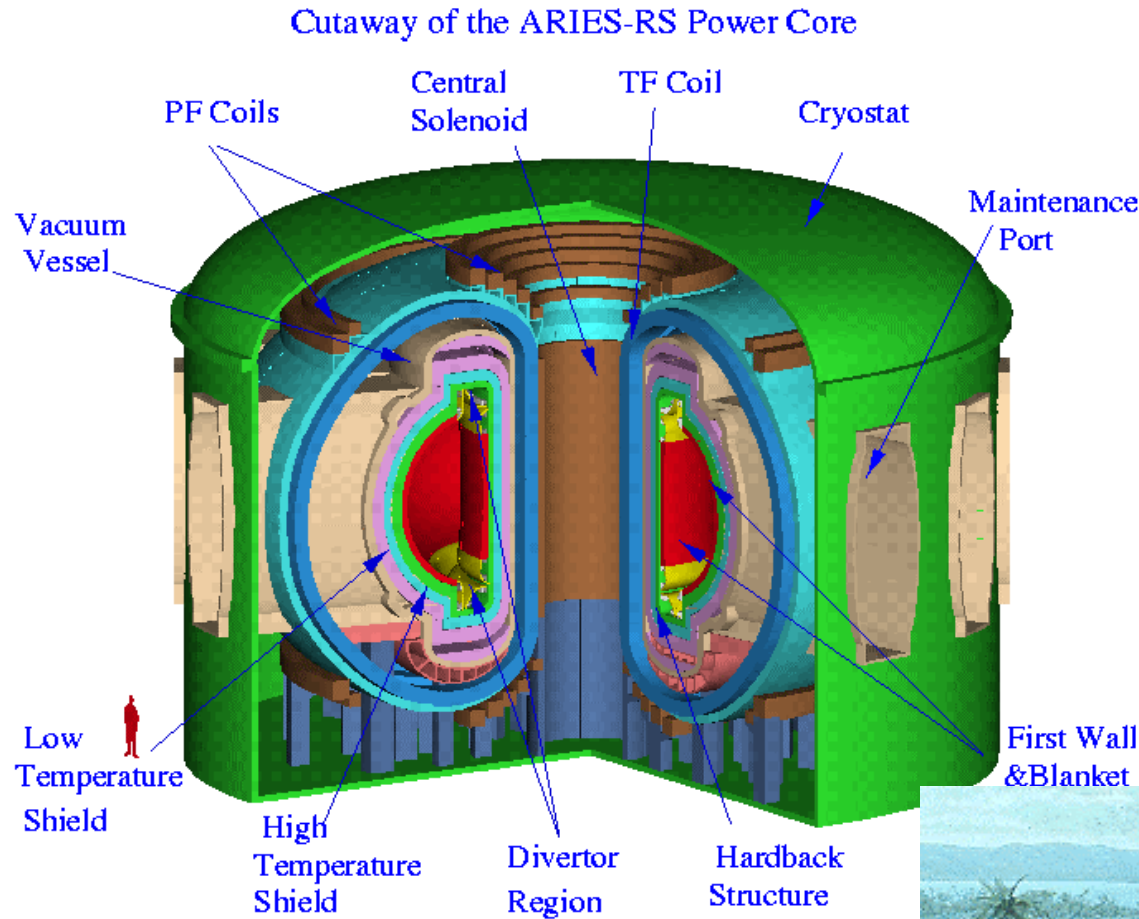



EFTB Toroidal Fusion Rocket

J. Reece Roth, NASA Lewis, 1972

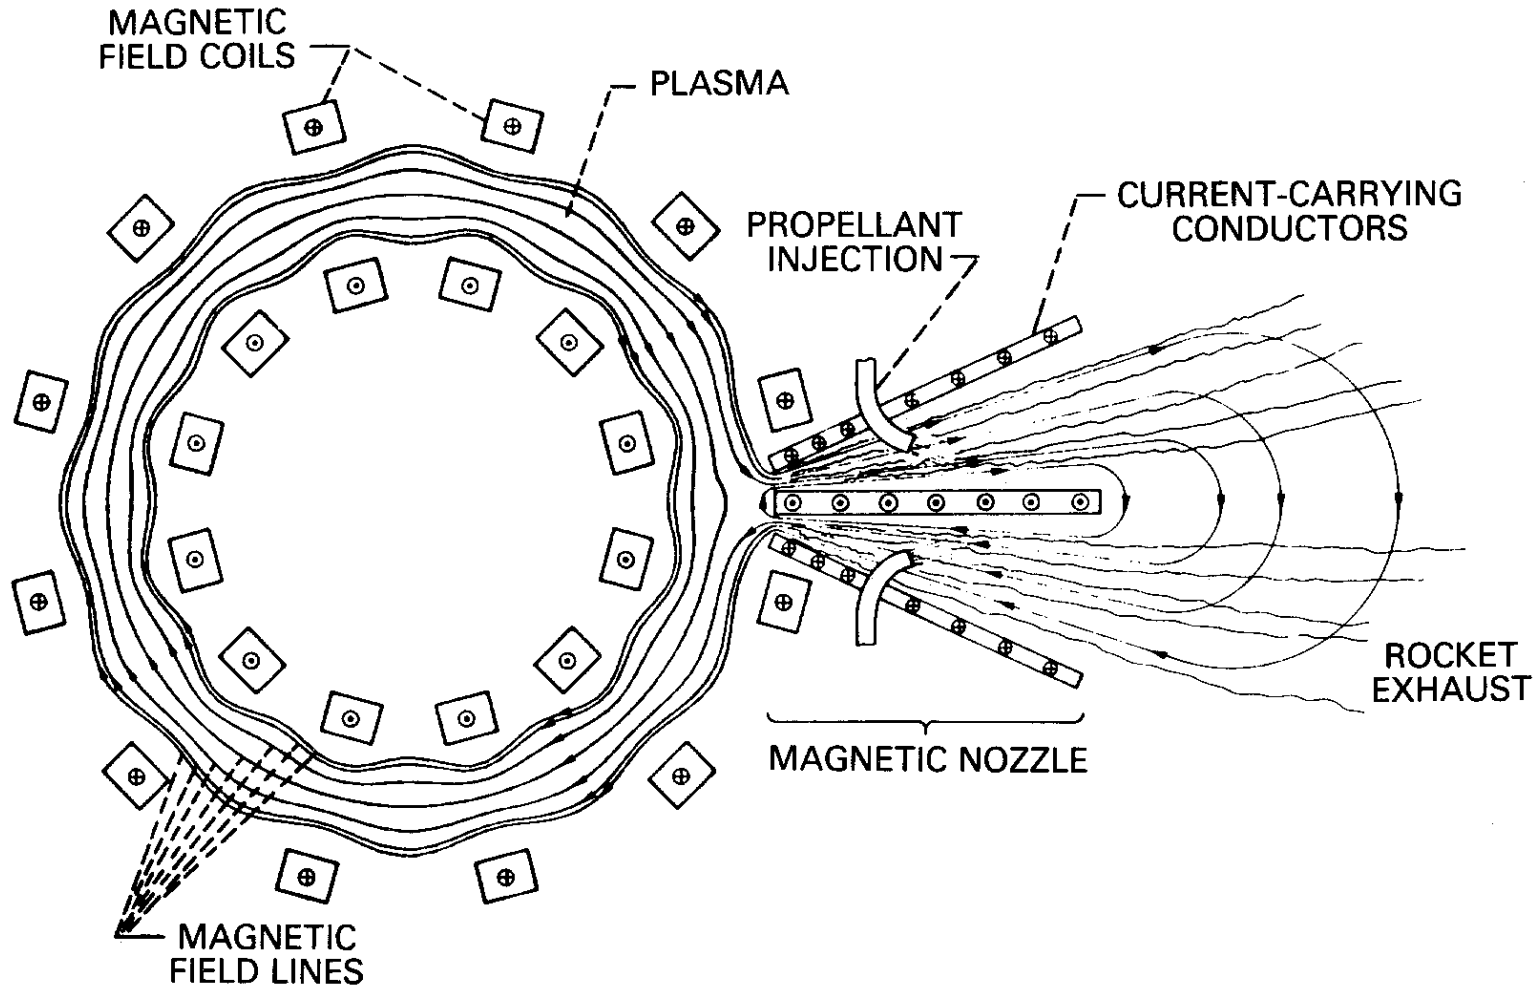




Spherical Torus Space Propulsion

- ST's give high β , implying high power density.
- Crucial problems are recirculating power and providing thrust.
- Martin Peng has suggested helicity *ejection*, and the concept will be tried on NSTX.


Princeton Plasma Physics
Lab NSTX experiment

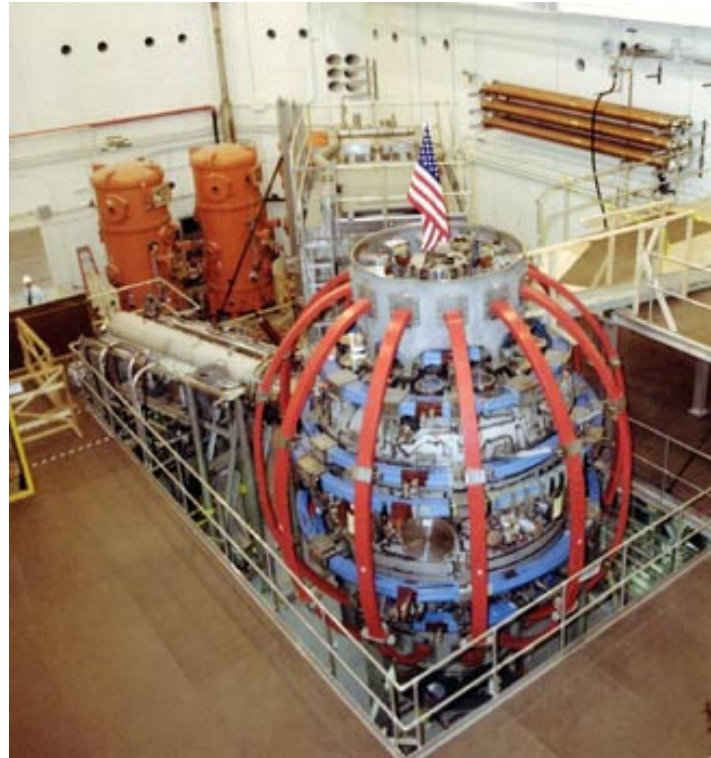



Plasma Power Flows in Linear Devices Differ Significantly from Flows in Toroidal Devices

- Power density can be very high due to $\beta^2 B^4$ scaling, but first-wall heat fluxes would remain manageable.
 - Charged-particle power transports from internal plasmoid to edge region and then out ends of fusion core.
 - Magnetic flux tube would be expanded in end chamber to reduce heat and particle fluxes, so charged-particle transport power only slightly impacts the first wall.

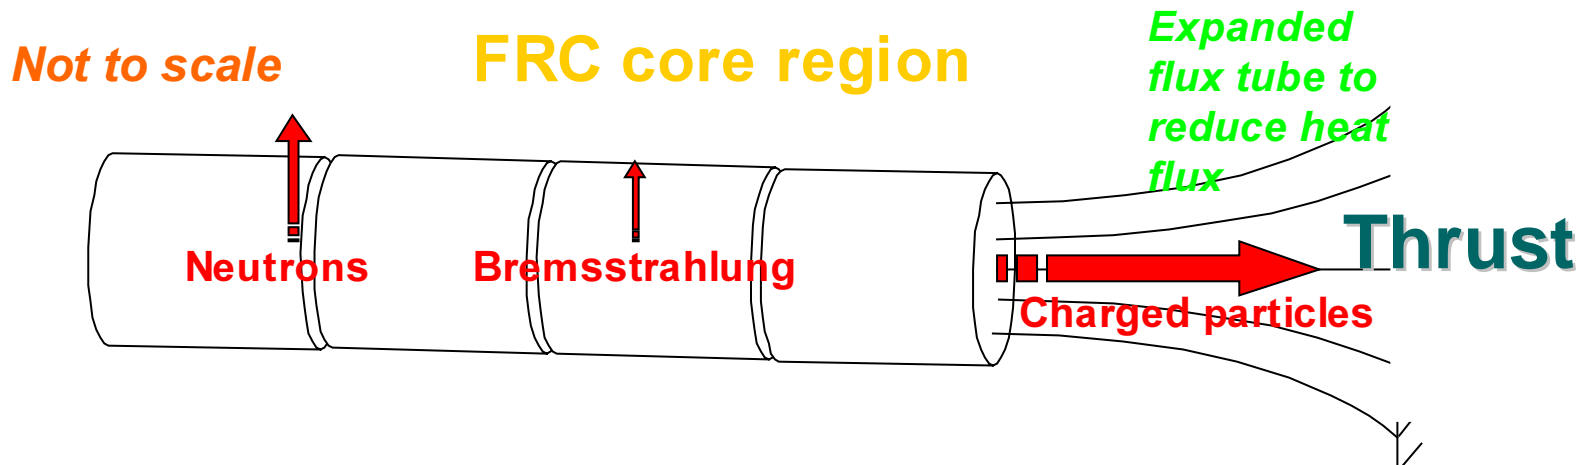




Linear Geometry Greatly Facilitates Engineering


- Steady-state heat flux is broadly spread and due almost exclusively to bremsstrahlung radiation power.
- Relatively small peaking factor along axis for bremsstrahlung and neutrons.
- Maintenance of single-unit modules containing blanket, shield, and magnet should be relatively easy, improving reliability and availability.
- Considerable flexibility and space exist for placement of pipes, manifolds, etc.
- Direct conversion of transport power to thrust by a magnetic nozzle would increase efficiency.




Several Concepts with Linear External Magnetic Fields Have Been Investigated for Space Propulsion

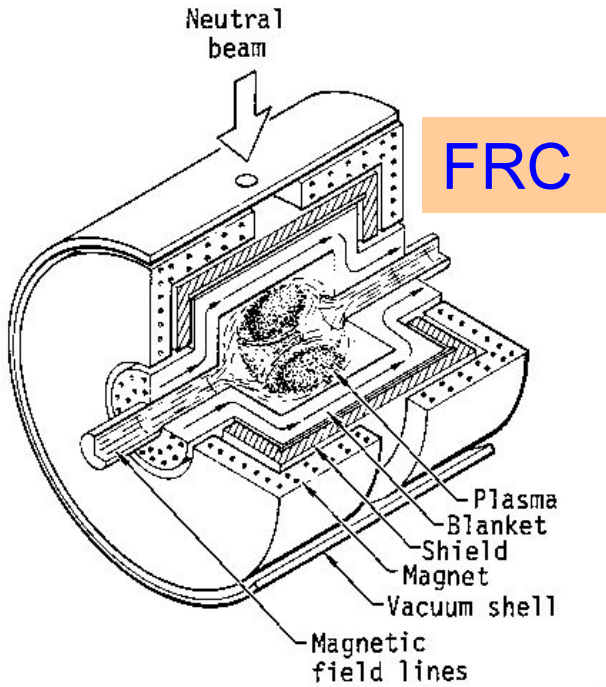

Spheromak

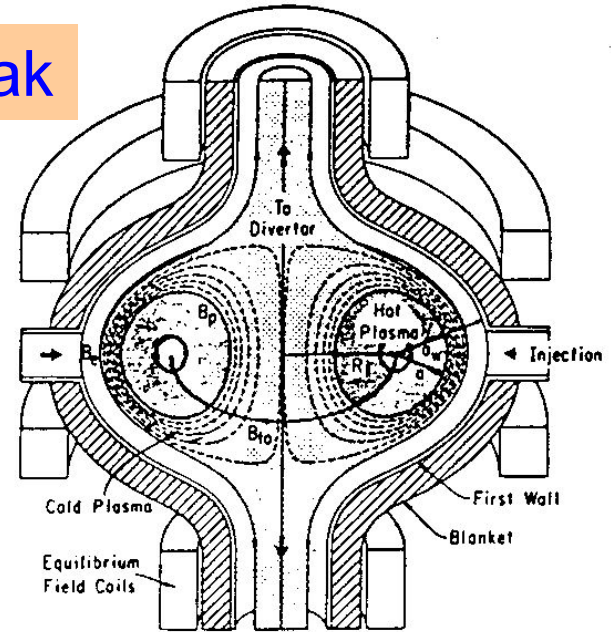


Tandem mirror

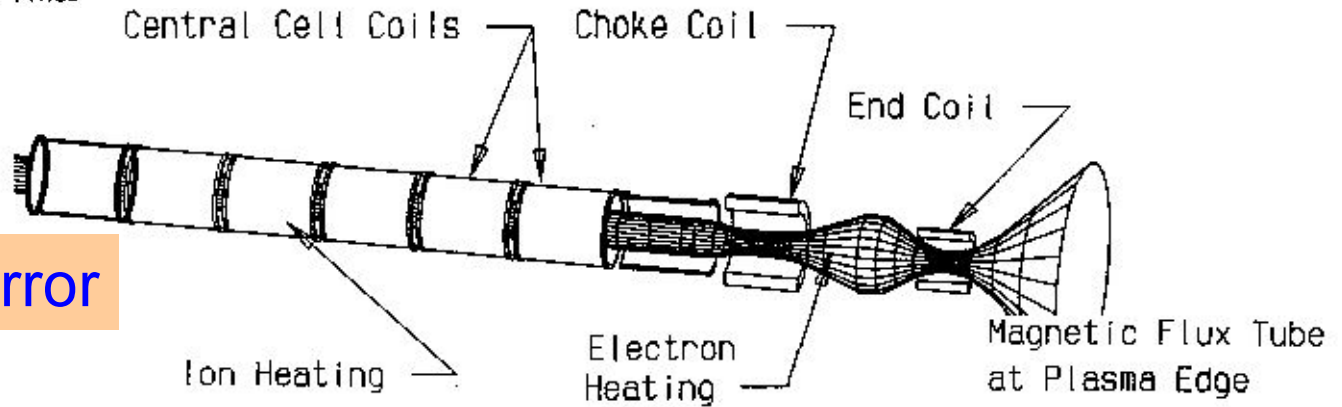




D-³He Space-Propulsion Tandem Mirror

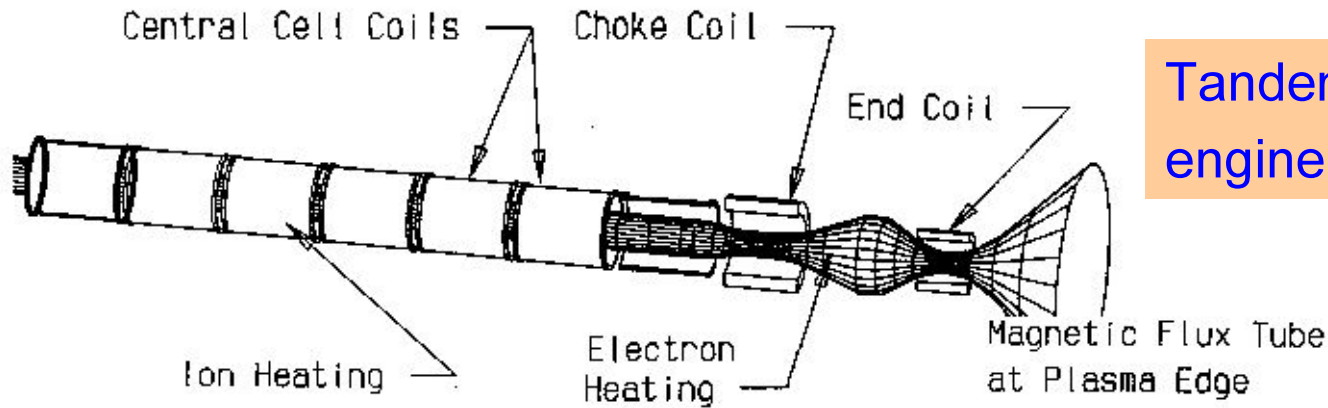

Tandem mirror engine

Tandem mirror rocket design by UW EMA 569 students


Specific power	1.2 kW/kg
Thrust power	1500 MW
Length	113 m
Ave. outer radius	1 m
Core B field	6.4 T

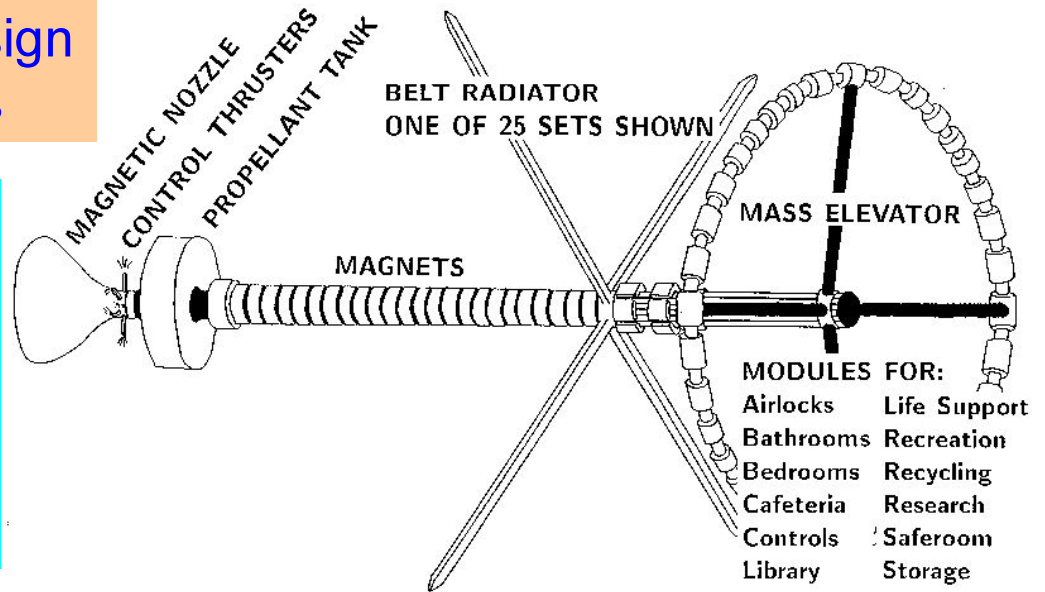




Field-Reversed Configurations (FRC) Would Be Attractive for Space Applications

Azimuthal current

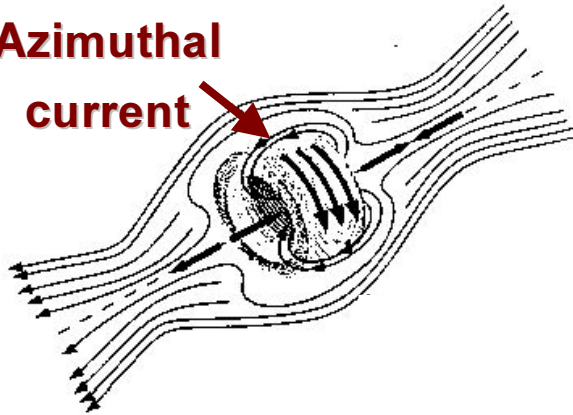

- High $\beta \equiv P_{\text{plasma}}/P_{\text{B-field}}$
- Linear external B field
- Cylindrical geometry
- RMF current drive

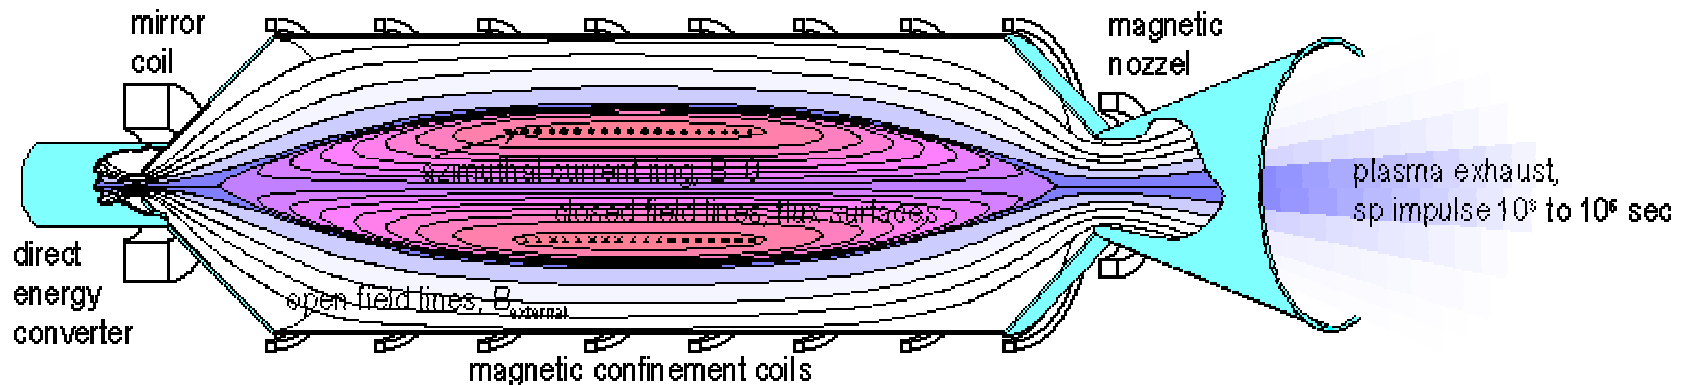


FRC as Power Source and Ion Engine for High Energy Space Missions

From Univ. of Washington web page for the Star Thrust Experiment (STX):
www.aa.washington.edu/AERP/RPPL/STX.html



The Dipole Configuration Offers a Relatively Simple Design That an MIT/Columbia Team Is Testing

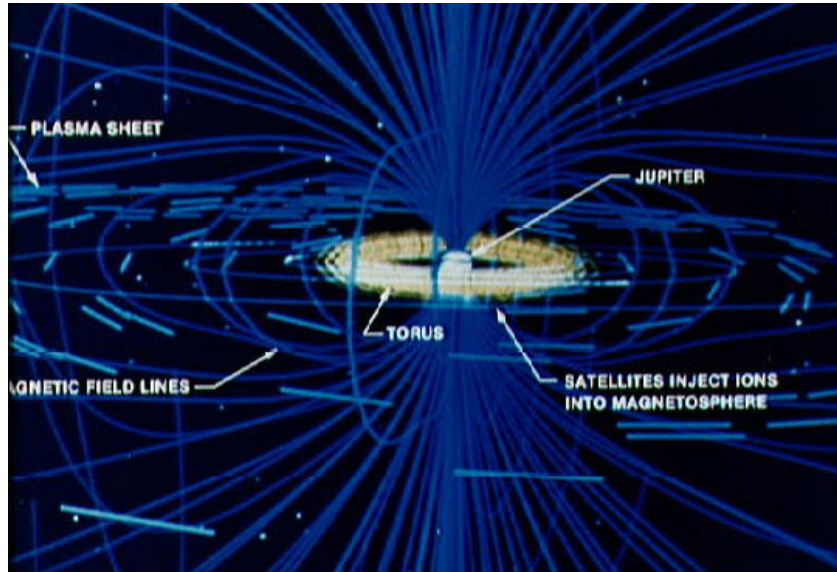

Io plasma torus around Jupiter


LDX experiment
(under construction at MIT)






D-³He Fusion Propulsion Could Provide Flexible Thrust Modes


**Fuel
plasma
exhaust**

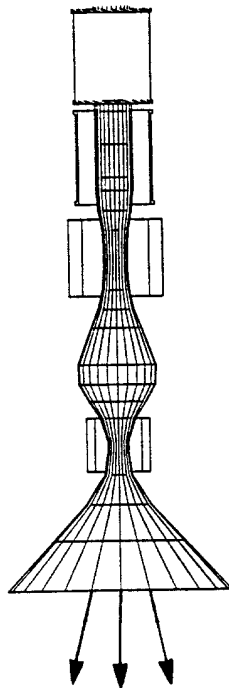

**Mass-
augmented
exhaust**

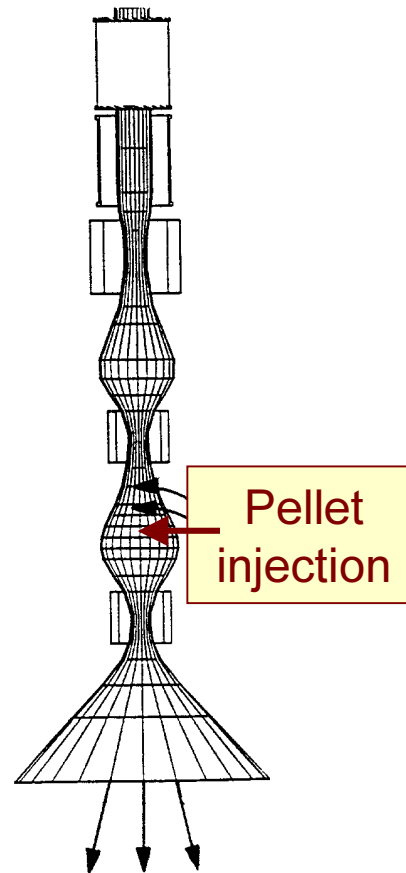


**Thermal
exhaust**

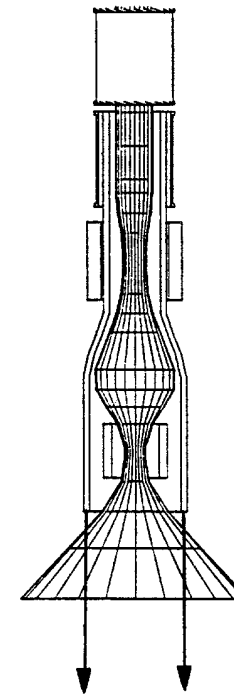




Direct Conversion to Electricity Could Take Advantage of the Natural Vacuum in Space

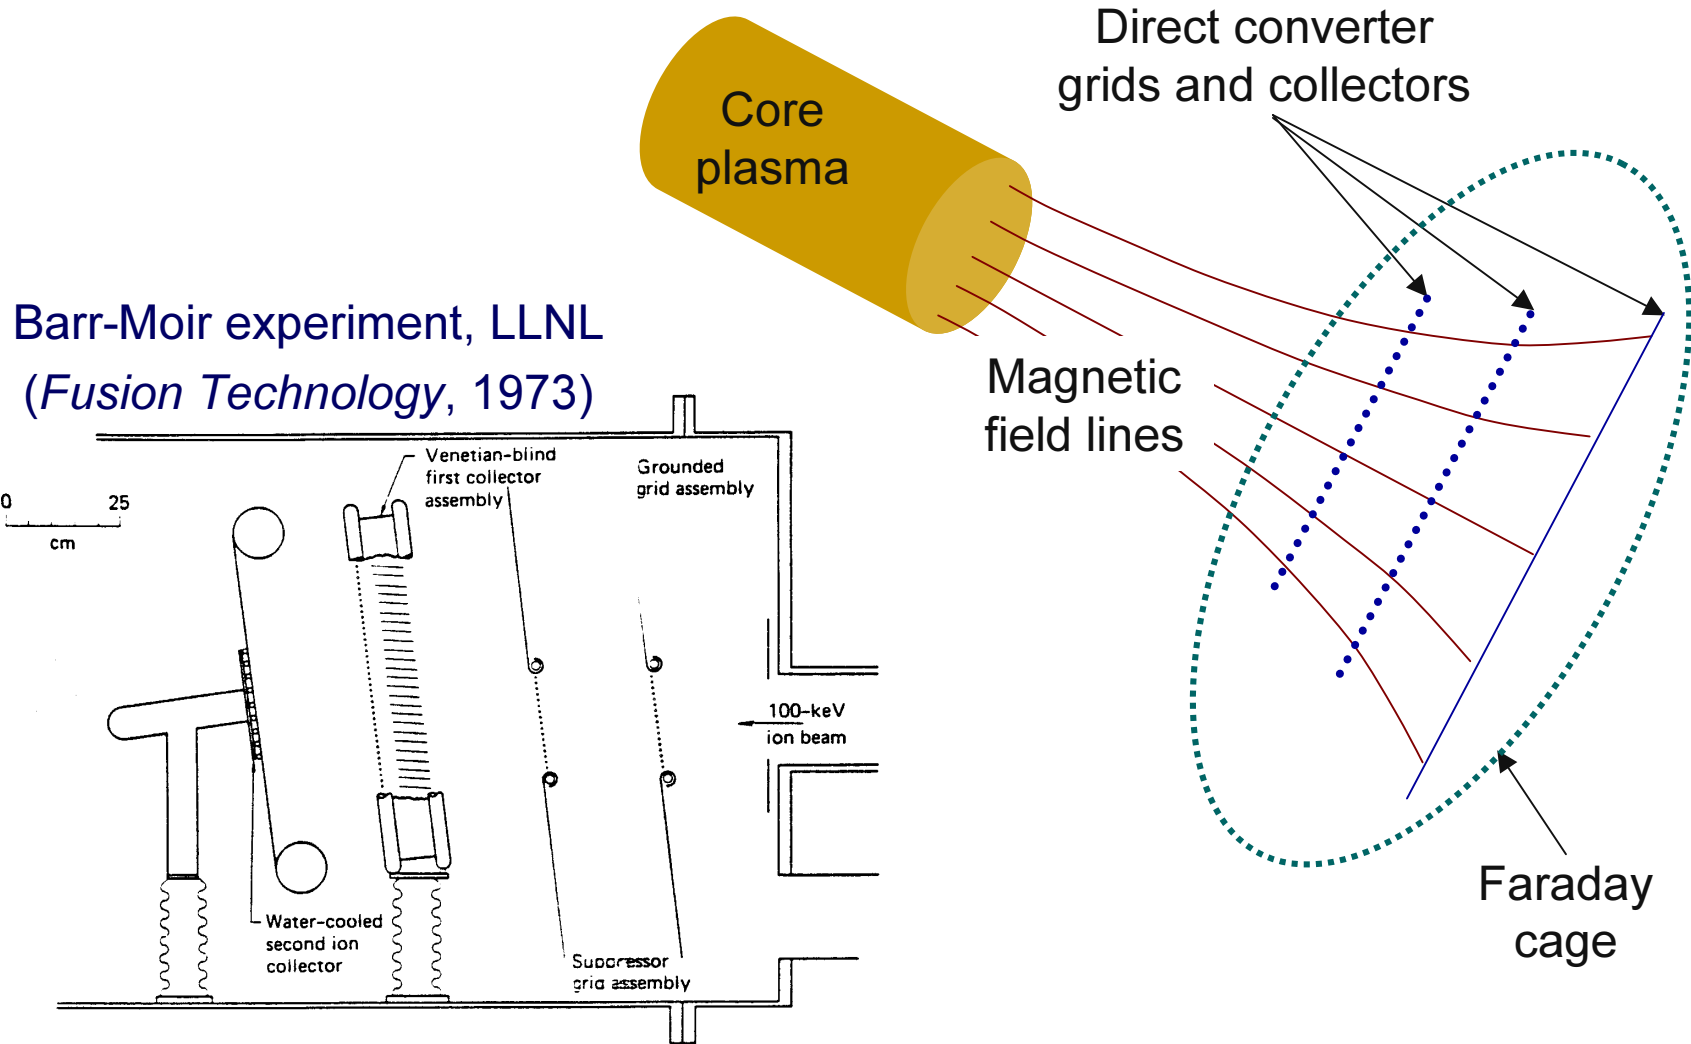



Plasmas Provide Many Materials Processing Capabilities

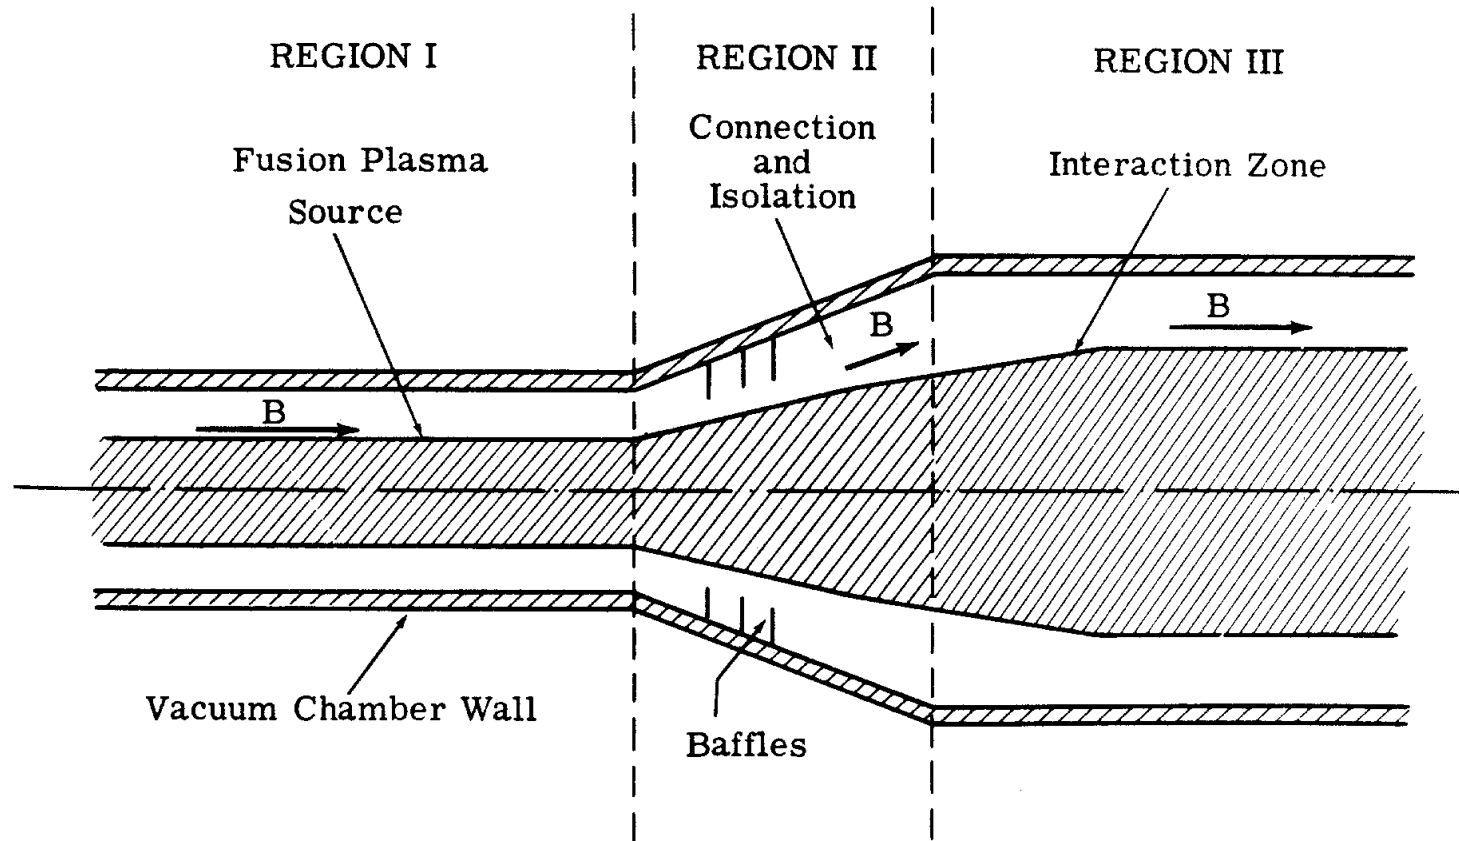

- B.J. Eastlund and W.C. Gough, "The Fusion Torch--Closing the Cycle from Use to Reuse," WASH-1132 (US AEC, 1969).



Summary

- Sufficient terrestrial ^3He exists for R&D, while lunar ^3He could fuel fusion applications for millennia.
- D- ^3He physics requires continued physics progress.
- D- ^3He engineering appears manageable.
- Successful development of D- ^3He fusion would provide attractive propulsion, power, and materials processing capabilities.