

Modeling Impact-Induced Reactivity Changes Using DAG-MCNP

Brandon Smith and Paul Wilson

University of Wisconsin-Madison

Nuclear and Emerging Technologies for Space
February 7-10, 2011
Albuquerque, NM

This work supported by Sandia National Laboratories via Laboratory Directed Research and Development funding. Sandia National Laboratories is a multi-program laboratory managed and operated by Sandia Corporation, a wholly owned subsidiary of Lockheed Martin Corporation, for the U.S. Department of Energy's National Nuclear Security Administration under contract DE-AC04-94AL85000.

Outline

Motivation

DAGMC

Analysis Setup

Reactivity Calculations

Summary

Although Rare, Launch Failures Do Occur

- ▶ After successful launch, space reactors provide high-density, continuous power
- ▶ Not all launches are successful
- ▶ Reactor may deform due to impact
- ▶ Predicting reactivity change due to impact is an important component of launch safety analysis



<http://www.g2mil.com/safety.htm>

Reactivity Analysis of Deformed Geometry is Difficult

Previous Efforts

- ▶ Approximate deformed shape by manually altering geometry
- ▶ Examine water/sand immersion at nominal or uniformly compacted density
- ▶ Significant manual effort with limited accuracy

Our Approach

- ▶ Structural analysis uses a finite element model (FEM) for high-fidelity geometric description
- ▶ DAGMC is optimized for facet-based models (FBMs)
- ▶ DAG-MCNP can be used to predict reactivity consequence of impact

Direct Accelerated Geometry: DAG-MCNP

DAG-MCNP is a coupling of the Mesh Oriented datABase (MOAB) and Monte Carlo N-Particle (MCNP) software packages [Tautges et al., 2009]

Software


- ▶ Common Geometry Module, Argonne (CGMA): geometry library, C++, open source
- ▶ MOAB: mesh library, C++, open source
- ▶ MCNP: physics code, FORTRAN, from LANL

Implementation

1. CGMA loads models with ACIS or OCC
2. MOAB calls CGMA to facet model
3. MCNP calls MOAB to perform geometric queries

Geometric Model: Faceted CAD Data

- ▶ BREP: volumes, surfaces, curves, vertices
- ▶ Solid model \rightarrow facet-based model (FBM)
- ▶ Non-manifold & faceted surfaces accelerate ray tracing




Deformed Geometry Challenges

- ▶ Convert FEM \rightarrow FBM
- ▶ Dead Elements (fracture)
- ▶ Element Volume Change
- ▶ Overlapping Volumes

New Feature: Mesh Geometry Initialization


Procedure

1. Load CAD model and facet surfaces
2. Load mesh model and, if they exist, replace faceted surfaces with mesh surfaces
3. Update node locations with coordinates from deformed mesh model
4. Remove *dead elements* from the mesh and recover affected surfaces
5. Converted quadrilateral mesh faces to triangles
6. Adjust material densities to accommodate volume changes


**FEM****FBM**

Contribution: Automatically convert deformed hexahedral mesh to facet-based model for DAGMC

Overlap Tolerance



No Overlap

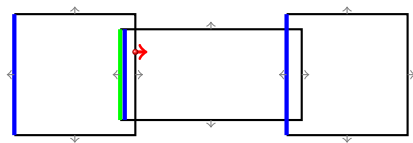

Overlaps


- ▶ Overlaps due to imprecise contact calculation in structural simulation, file translation, imperfect draftsmanship

Assumption Overlaps are small \rightarrow material choice does not significantly affect physics


- ▶ Monte Carlo codes lose **all particles** that encounter overlaps

Solution improve draftsmanship, avoid translation, repair manually, **change tracking algorithm**

New Feature: Overlap-Tolerant Particle Tracking



No Overlap




Overlaps

- ▶ For efficiency, DAGMC only searches the current volume for exit intersections
- ▶ Search behind the ray origin for exit intersections
- ▶ Correct orientation is necessary, but not sufficient
- ▶ If overlap, particle will be inside next volume

Result: Move particle zero distance to bring logical position (the volume it is in) and geometric position (its coordinates in space) into agreement.

New Feature: Overlap-Tolerant Point Inclusion Test




Test Point	Old Method	New Method
A	<i>inside</i>	<i>inside</i>
B	<i>outside</i>	<i>outside</i>
C	<i>outside</i>	<i>inside</i>
D	<i>inside</i>	<i>inside</i>

- ▶ Point inclusion test used to start source particles & tracking
- ▶ *Ray intersection method* compares direction of ray with surface normal at closest intersection
 - Problem** The exit/entrance of first intersection is unreliable, due to self intersections
- ▶ Instead, sum all entrance/exit intersections along ray to ∞
- ▶ *Inside points will have at least one more exit than entrance*

85-Pin Space Reactor [Marcille et al., 2006]

- ▶ 25 kW_e core is 38 cm high, 22.9 cm diameter
- ▶ UO₂ fuel pins clad in 316 SS and cooled by NaK
- ▶ Six B₄C/Be control drums inside 15.3 cm radial Be reflector
- ▶ Surrounded by borated water shield
- ▶ Structural components are 316 SS
- ▶ Engineering details added as described by [Villa et al., 2011]

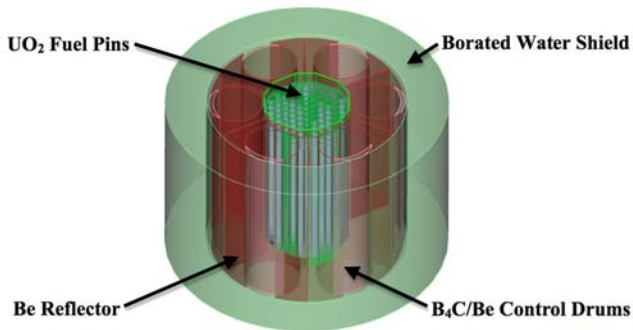


Analysis Workflow

1. Create CAD model and mesh in CUBIT
2. Optional: fill fluid volumes with SPH elements
3. Perform structural analysis with PRESTO
4. Perform reactivity analysis with DAG-MCNP
 - ▶ Assign boundary conditions and materials to CAD model within CUBIT
 - ▶ Create MCNP input file containing only data cards—no cell or surface cards
 - ▶ Initialize deformed mesh model for DAGMC
 - ▶ Determine k_{eff} using DAG-MCNP

Model creation and structural analysis performed at SNL by Villa et. al.

Compare Native MCNP vs. DAG-MCNP

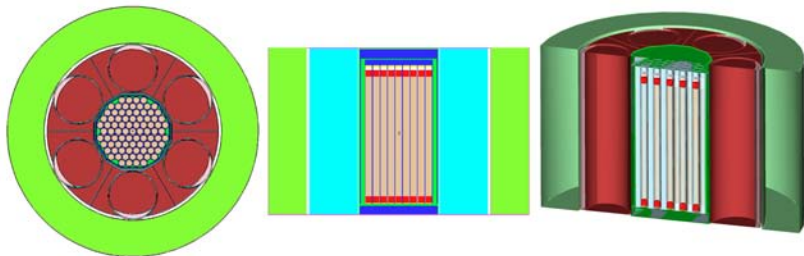

- ▶ 85-pin space reactor with control drums rotated for minimum absorption
- ▶ Automated conversion of geometry, materials, and boundary conditions from MCNP geometry to ACIS CAD geometry
- ▶ Intentionally forced CAD model to have coincident, overlapping surfaces
- ▶ Used to validate overlap-tolerant logic before analyzing deformed geometry


Native MCNP5

- ▶ Native geometry
- ▶ $k_{eff} = 1.01437 (\pm 0.00075)$

DAG-MCNP5

- ▶ CAD Geometry, $\epsilon_f = 1 \mu\text{m}$
- ▶ $k_{eff} = 1.01451 (\pm 0.00080)$

Deformed Reactor Simulations

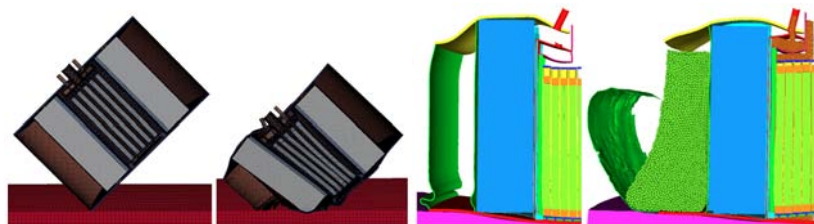

45-degree 0 ms

45-degree 2.1 ms

0-degree 1.5 ms


0-degree SPH 1.5 ms

Simulation	Angle [degrees]	SPH	Symmetry	Entity Count				Tracking Rate [part./min.]
				Vol.s	Surfs.	Hex.	Tris.	
1	45	no	1/2	3176	11729	8.86M	11.1M	2741
2	0	no	1/12	1308	6673	962k	1.43M	3793
3	0	yes	1/12	3181	17867	966k	1.51M	3137

- ▶ Reactor impacts concrete impact at 100 m/s
- ▶ Fluids modeled in 0-degree structural analysis using SPH particles
- ▶ Fluids not modeled in reactivity analysis
- ▶ Control drums rotated for maximum absorption
- ▶ **First known mesh-based reactivity analysis of deformed reactors**

Reactivity

- ▶ Each DAG-MCNP5 case required 5-7 hours on one core of 2.66 GHz Intel Core2
- ▶ Error bars (small) indicate 1 standard deviation

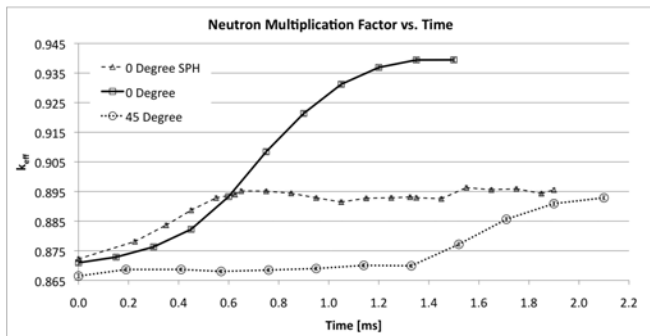

Discussion

- ▶ **45-degree simulation:** k_{eff} did not increase until ~ 1 ms when fuel pins moved relative to one another
- ▶ **0-degree SPH simulation:** SPH elements limit contact of adjacent fuel pins \rightarrow restrict increase in k_{eff} to 2.7%

Effect of Fluids in Reactivity Analysis

- ▶ Boundaries of fluid volumes puncture due to fracture → fluids mix
- ▶ Water shielding and NaK coolant not modeled in reactivity analysis
 - ▶ Future work: use SPH elements in reactivity analysis
- ▶ Use undeformed CAD model to estimate effect of fluids
 - ▶ Fluids: $k_{eff}=0.87987$ (0.00064)
 - ▶ No Fluids: $k_{eff}=0.87112$ (0.00069)
- ▶ For reactivity calculation, including fluids increases k_{eff} by $\sim 1\%$

Summary

- ▶ DAG-MCNP used to determine k_{eff} of complex deformed mesh geometries
- ▶ Fluids in the structural simulation are crucial for producing realistic results
- ▶ More work is needed to understand the effect of fluids in the reactivity analysis
- ▶ In the most realistic simulation, k_{eff} increases 2.7%
- ▶ Reactor remains subcritical, due to substantial subcriticality at launch

Extensions

- ▶ Simplify workflow to depend only on deformed mesh file
- ▶ Simulate fluids in reactivity analysis, possibly with SPH elements

Acknowledgments

- ▶ Paul Wilson, Tim Tautges, and Jason Kraftcheck at UW-Madison
- ▶ Daniel Villa, Tyler Tallman, Jeffrey Smith, Ron Lipinski, Tracy Radel, and Ross Radel at Sandia National Laboratories
- ▶ Sandia National Laboratories' Lab Directed Research and Development Program

Smith, J.A., Villa, D.L., Smith, B.M., Radel, R.F., Radel, T.E., Tallman, T.N., Lipinski, R.J., and Wilson, P.P.H., *Methods for Modeling Impact-Induced Reactivity Changes in Small Reactors*, Sandia National Laboratories Report SAND2010-6412 (2010).

Questions?

`bmsmith6@wisc.edu`

References I



Marcille, T. F., Dixon, D. D., Fischer, G. A., Doherty, S. P., Poston, D. I., and Kapernick, R. J. (2006).
Design of a Low Power, Fast-Spectrum, Liquid-Metal Cooled Surface Reactor System.
In Proc. of the Space Technology and Applications Int. Forum—STAIF 2006, pages 319–326.



Tautges, T. J., Wilson, P. P., Kraftcheck, J. A., Smith, B. M., and Henderson, D. L. (2009).
Acceleration Techniques for Direct Use of CAD-Based Geometries in Monte Carlo Radiation Transport.
In Proc. Int. Conf. on Mathematics, Computational Methods, and Reactor Physics.



Villa, D. L., Tallman, T. N., and Smith, J. A. (2011).
Challenges in Structural Analysis for Deformed Nuclear Reactivity Assessments.
In Proc. of Nuclear and Emerging Technologies for Space 2011—NETS2011. American Nuclear Society.